ISSN: 2617-2070 (Print) ; 2617-2070 (Online)



Journal of Advanced Sciences and Engineering Technologies Available online at: http://jaset.isnra.org/ Journal of Advanced Sciences and Eng. Technologies

JASET

Yasser I O Yahia¹ Manal O. Suliman² Abdulrazzaq Jawish Alkherret³ shehdeh ghannam

Department of Civil Engineering, JareshUniversity, Jaresh, Jordan

corresponding Email: <u>v.lbrahim@jpu.edu.jo</u>

Keywords

managing Nominal load, Ultimate Carrying Capacity, Short Squire Column, Yield Strength, Compressive Strength.

ARTICLE INFO

Article history:

Received01 October 2020Accepted18- November -2020

Available online 25–November 2020

DOI:

http://dx.doi.org/10.32441/jaset.03.02.04 Copyright © 2018 by author(s) and This work is licensed under the Creative Commons Attribution International

License (CC BY 4.0). http://creativecommons.org/licenses/by/4.0

CC O pen Access

Theoretical Analysis of Factors Affecting Ultimate Nominal Load of Reinforced Concrete Axially Loaded Short Squire Columns (Pu) Comparing use Prokon Program

ABSTRACT

 ${\cal O\!n\!e}$ of this theoretical study, parameters that affecting

the ultimate load capacity of the axially loaded column are studied. The parameters such as compressive strength of concrete and steel reinforcement ratio. Throughout study a different value of each factor will be assumed. Then the nominal load-carrying capacity of axially loaded column was calculated for these different factors parameters according using the simplified methods provided in (ACI-318-14) building code requirement for structural concrete and Prokon Program. It is observed that increasing the compressive strength of concrete result in improving the ultimate load capacity. Using compressive strength of concrete more than 40MPa which results in increasing of (Pu) from (2362kN) to(5918KN). On other hand The total area of longitudinal reinforcement bars (AST), and the gross area of concrete section (Ag) have a significant effects also on increasing of (Pu) value but not as (Fc').

© 2018 JASET, International Scholars and Researchers Association

Introduction

In general, reinforced concrete columns rectangular or circular cross-section have steel mesh to offer reinforcement. The crosssectional dimensions of a column are normally considerably less than its height. Columns support vertical loads from superstructures to the foundations. The ultimate strength of axial loaded columns is governed by the crushing resistance of concrete, assuming that reinforcing bars are ductile enough to deform at constant yield stress until concrete crushes in compression [3,4]. A combination of all of the mentioned requirements and an inter-relationship between these criteria creates column design as a complex problem. Nominal Load-Carrying Capacity of Axially Loaded Short Columns Axial strength φ Pn: For compression members shall not be taken greater than φ (Pn,max) computed by ;

1- For non-prestressed members with spiral reinforcement;

$$Pu = \emptyset Pn, max = 0.85 * \emptyset [0.85 f'c * (Ag - Ast) + Ast * fy]$$
(1)

2- For non-prestressed members with tie reinforcement; $Pu = \emptyset Pn, max = 0.8 * \emptyset [0.85 f'c * (Ag - Ast) + Ast * fy]$ (2)

 $Pu = \emptyset Pn, max$ $\emptyset = 0.65 for tied Columns$ $\emptyset = 0.75 for Spirally reinforced Columns$

The Behavior of Reinforced Concrete Short Column

Reinforced concrete columns, have to the complex nature of the governing design relationships, are highly multidimensional optimization issues. Therefor a reinforced concrete column can be subjected to axial load or a combination of axial load and bending moment. The bending moment acting on the column may be uniaxial or biaxial [1,2]. In this study only, the action of column with axial load is taken. Generally column can be classified as short columns or slender column depend on slender ratio. The ratio of effective length of the column to its lateral dimension is defined as slenderness ratio [3,4]. In order to study the effect of the ultimate nominal load carrying capacity of axially loaded short squire columns (Pu) theoretically, square column with (400mm*400mm) dimension is assumed.

(3)

2.1 Methodology

In this theoretical study, different values of concrete compressive strength and steel ratio are taken to illustrate the performance of reinforced concrete axially loaded columns.

The columns dimension, is (400 mmx400 mm and length 3 m). Three group of samples can be constructed as shown in Table 1.

According to ACI- 318 specification the ultimate load capacity of axial columns are calculated and compared with Prokon program results.

Item	Sample	f _{cu} , (MPa)	ρ _g ,(%)	
	C11	30	2	
	C12	40	2	
Set 1	C13	60	2	
	C21	30	4	
	C22	40	4	
Set 2	C23	60	4	
	C31	30	8	
	C32	40	8	
Set 3	C33	60	8	

Table 1. R.C. Columns Samples with Different Variables

Load Capacity Output by American of *Concrete Institute Code (ACI-318)*

The analysis results of the ultimate load based on ACI318-14 procedures are presented in Table z

.

Table 2. Analysis results of ultimate load based on ACI 318M-2011 procedures						
Set No.	Sample	fcu, (MPa)	ρ ₉ ,(%)	Pu (KN)	Increased P _u (%)	
Set 1	C11	30	2	2362	-	
	C12	40	2	2916	23	
	C13	60	2	4025	70	
Set 2	C21	30	4	3026	-	
	<i>C22</i>	40	4	3570	18	
	<i>C23</i>	60	4	3841	27	
Set 3	C31	30	8	4357	-	
	<i>C32</i>	40	8	4877	12	
	<i>C33</i>	60	8	5918	35	

1. Results and Discussion

3.1 Analysis of High-Performance Strength Reinforced Concrete Columns by Program Prokon


PROKON established and supported by a team of professional is engineers and intended for use by structural engineers and technicians. It is design and detailing programs to simplify the Structural Analysis

and Design process and provides reliable output design data for reinforced concrete members and steel design member as well. *Load Type*

The variety of load combination are applied gradually on columns according to code specification. See table 3

Ite	em	Fcu 30 (MPa)		(A _{sc} /Ac)	
Load Case	Load (KN)	M _{min} (KN.m)	A _{sc} (mm ²)	(%)	
1	2362	63.7	3188	1.99	
2	2916	78.7	5862	3.66	
3	4025	108.7	11199	7 *	
Ite	em	Fcu 40 (MPa)		(A _{sc} /Ac)	
Load Case	Load (KN)	M _{min} (KN.m)	A _{sc} (mm ²)	(%)	
1	3026	81.7	3733	2.33	
2	3570	96.4	6396	4	
3	3841	103.7	7722	4.8	
Ite	Item Fcu 40 (MPa)		0 (MPa)	(A _{sc} /Ac)	
Load Case	Load (KN)	M _{min} (KN.m)	A _{sc} (mm ²)	(%)	
1	4357	117.7	4878	3	
2	4877	131.7	7513	4.7	
3	5918	159.8	12794	8 *	

Table 3. Effect of loads cases & fcu on behavior response of R.C. columns.

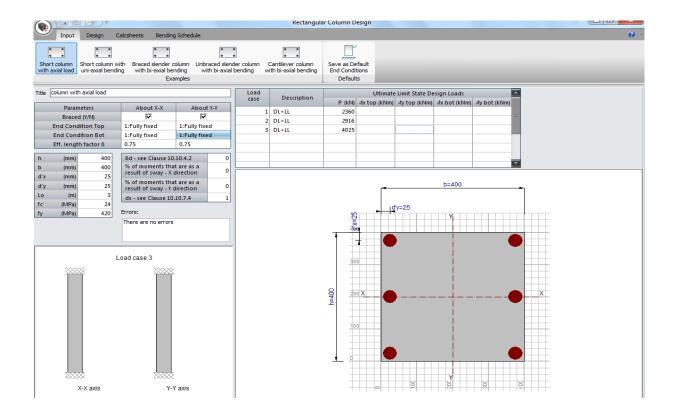

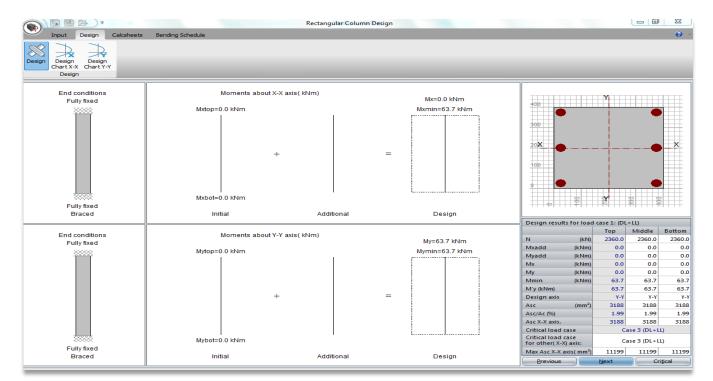


Figure.1,2. Input data details and output results in program Pokon v.3 of the column sample

Conclusion

Based on the theoretical results obtained by Prokon software program and ACI-318 specification the following conclusions may be drawn

- The increasing of compressive strength of concrete (fc) has the greatest effect in increasing the ultimate load capacity of the column.
- It's also demonstrated that the increase of (Ast) and increase of (Ag) has a significant effect in increasing the (Pu).
- Prokon software program has been used to design all columns as per ACI 318M-14 code requirements for axial loads as well as bending moments.
- Prokon software program is one of the most famous structural engineering software's used for 3D model generation, analysis and multi-material design.
- Prokon software program is very easy to learn and work, accurate for both analysis and design, and one of preferable software's used for the design of structures.
- Computer programs such Prokon software program is used to determine
- the ultimate load capacity of different short rectangular reinforced concrete columns designed under axial loads plus uniaxial bending.
- Further empirical study should be conducted on the effect of the (fc, fy, Ast, and Ag) on the ultimate strength of eccentrically loaded columns: axial load and bending (uniaxially and biaxially loaded columns).

Acknowledgement:

The authors are thankful respectively to for their support and to Jerash University (Jerash- Jordan) for providing their Laboratories and premises; our thanks extend to the reviewers for their valuable suggestions that led to enhancement of the quality of article.

References

[1] Chew, K. H. (2017). Optimal structural design for offshore wind energy system (Doctoral dissertation).

[2] Breccolotti, M., Materazzi, A. L., & Regnicoli Benitez, B. (2019). Curvature ductility of biaxially loaded reinforced concrete short columns. Engineering Structures, 200, 109669. doi:10.1016/j.engstruct.2019.109669

[3] Lin, S., Zhao, Y.-G., & Li, J. (2019). An improved wrapping scheme of axially loaded fiber-reinforced polymer confined concrete columns. Composite Structures, 226, 111242. doi:10.1016/j.compstruct.2019.111242

[4] Farhan, O. S. (2019). Effect of Use Recycled Coarse Aggregate on the Behavior of Axially Loaded Reinforced Concrete Columns. Journal of Engineering, 25(10), 88–107. doi:10.31026/j.eng.2019.10.07

[5] Lin, S., Zhao, Y.-G., & Li, J. (2019). An improved wrapping scheme of axially loaded fiber-reinforced polymer confined concrete columns. Composite Structures, 226, 111242. doi:10.1016/j.compstruct.2019.111242

[6] Al-Maliki, H. N. (2020). Numerical Analysis of Strength Capacity of High-Performance Reinforced Concrete Columns with Varied Parametric Study. The Open Civil Engineering Journal, 14(1). [7] A.H. Nilson, D. Darwin, and C.W. Dolan, Design of concrete structure., McGraw-Hill Book Company, 2014. [6] A.J. Ahmad, Comparative studies of reinforcement concrete beam design using, BS 8110 and ACI 318. Doctoral dissertation, University Malaysia Pahang, 2010.

[8] A.S. Alnuaimi, I.I. Patel, and M.C. Al-Mohsin, "Design results of re members subjected to bending, shear, and torsion using ACI 318: 08 and BS 8110: 97 building codes", Pract. Period. Struct. Des. Constr., vol. 18, no. 4, pp. 213-224, 2012.
[http://dx.doi.org/10.1061/(ASCE)SC.1943-5576.0000158]

[9] Column Research Committee of Japan, Handbook of Structural Stability., Corona Publishing Company, Ltd.: Tokyo, 1971.

[10] K.K. Choi, Reinforced concrete structure design assistant tool for beginners., Doctoral dissertation, University of Southern California, 2002.

[11] B.S. Choo, and T.J. MacGinley, Reinforced concrete: design theory and examples., CRC Press, 2002.

[12] A.A. Jawad, "Strength design requirements of ACI-318M-02 Code, BS8110, and EuroCode2 for structural concrete: A comparative Study. J., Engin", Develop., vol. 10, no. 1, pp. 22-28, 2006.

[18] R.S. Atiyah, General comparison and evaluation of TEC-2007 and EC8 Using Sta4-Cad V12. 1 in respect of cost estimation, Master's Thesis, Near East University TRNC, 2013.

[19] Chew, K. H. (2017). Optimal structural design for offshore wind energy system (Doctoral dissertation).

[20] Albitar, M., Ali, M. M., & Visintin, P. (2017). Experimental study on fly ash and lead smelter slag-based geopolymer concrete columns. Construction and Building Materials, 141, 104-112.